


196 Series Dual Flowmeter Regulators

196 Series Flowmeter Regulators are designed for MIG & TIG applications to provide accurate regulation of gas flow. They are also ideal for commercial industrial and laboratorial applications.

- Regulator is preset at 50 psi (3.5 bar)
- Body machined from class “A” brass
- Single-stage construction
- Monitoring two separate gas flow settings at the same time
- 2” gauge and two 195FM flowmeters
- Polycarbonate flow tube and hood are impact resistant for maximum durability and service life
- Calibrated for argon, helium and 75% argon/25% CO₂ mixed gases
- Flowmeter is backpressure compensated to ensure accurate readings when line restrictions are present
- Sintered bronze inlet filter
- Weight: 4 lbs 10 oz (2.1 kg)
- Conforms to CGA E-4 Standard for Gas Pressure Regulators

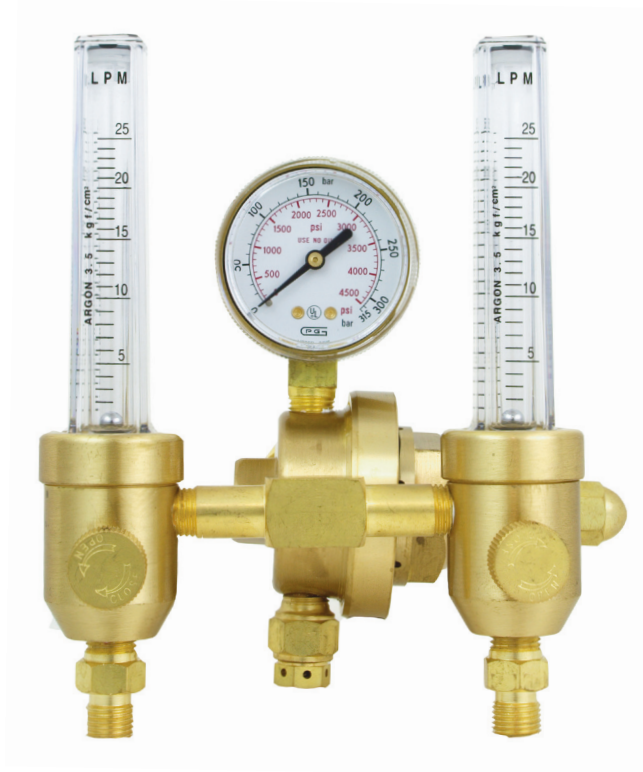

Model Number	Gas Service	Outlet Pressure	Inlet Gauge	Flowmeter	Inlet Connection*	Outlet Connection
196AR-25L	ARGON	50 psi (3.5 bar)	2", 4000 psi	25 LPM	BS3, G 5/8"-RH(M)	G 3/8"-RH(M)
196HE-50L	HELIUM	50 psi (3.5 bar)	2", 4000 psi	50 LPM	BS3, G 5/8"-RH(M)	G 3/8"-RH(M)

*Products can be ordered with German (DIN) connections . Please confirm when ordering.