



Direct Current Output



50/60 Hz Input Power Source



Forced Air Cooling



Energy Saving And Environment Friendly




Constant Current



Electro Magnetic Compatibility

Features

- Easy-to-use operation panel
- Optional cable remote control guarantees convenient remote operation
- Excellent welding quality, optimum arc dynamic characteristics
- Suitable for all acid, basic, stainless, low hydrogen electrodes

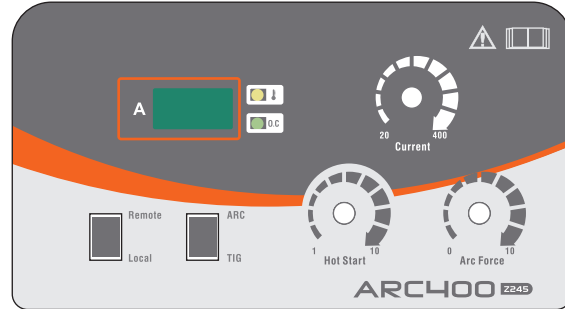

Functions

Standard

- Hot start
- Arc force
- Lift TIG (Z245)
- O.C. & O.H. protection

Optional

- Cable remote control
- Generator compatibility (Z298)

Accessories

Optional

- 500A earth clamp +50mm²×3m cable +quick plug
- 500A electrode holder+50mm²×3m cable+quick plug
- Cable remote control box



ARC400 Z245	
Input power source	3~AC440V±15% 50/60Hz
Rated input current (A)	28
Rated input power capacity (kVA)	18.3
Power factor (cosφ)	0.93
Output current range (A)	20~400
Arc force range (A)	0~240
Hot start range (A)	0~150
Rated no-load voltage(V)	68
Rated duty cycle (%) @40°C	60
Efficiency	85
Protection class	IP21S
Insulation class	F
Dimensions (mm)	592×297×523
Weight (Kg)	32